

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

D1

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : C05F 1/00, 1/02, 17/02, 9/02, 17/00	A1	(11) International Publication Number: WO 00/37393
		(43) International Publication Date: 29 June 2000 (29.06.00)

(21) International Application Number: PCT/AU99/01133

(22) International Filing Date: 21 December 1999 (21.12.99)

(30) Priority Data:

PP 7816	21 December 1998 (21.12.98)	AU
PQ 3140	29 September 1999 (29.09.99)	AU

(71) Applicant (for all designated States except US): C.S. ASSOCIATED PTY. LTD. [AU/AU]; 596 Anzac Highway, Glenelg East, S.A. 5045 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): WADEWITZ, Peter [AU/AU]; 596 Anzac Highway, Glenelg East, S.A. 5045 (AU).

(74) Agent: COLLISON & CO.; 117 King William Street, Adelaide, S.A. 5000 (AU).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: ANIMAL BODY COMPOSTING

(57) Abstract

A method of composting especially high protein waste which reduces noxious odour and assists in reducing pathogens by recirculating substantially only the air and gaseous product of the composting process through the composting materials which are separated by layers of absorbent chips.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

ANIMAL BODY COMPOSTING

This invention relates to a method and apparatus for composting waste and for compost resulting from such method and use of such apparatus.

5 It is currently known to dispose of animal bodies such as poultry by depositing these in an essentially open container and letting these decompose.

10 A number of problems exist with current composting practices a first of these being a problem of obnoxious smell, a second problem relates to biosecurity where infections resulting in pathogens, can be either released or cross infect other environs, and a further problem relates to disposal of material even when composted if it is not biologically safe.

15 I have discovered then that if the composting materials are held in a closed container and the air in the system only is recycled through the composting materials, then this provides significant benefits.

20 In other words by recirculating over a substantial time only the air and gaseous materials that already exist or are being formed within a closed circuit, then this has surprisingly beneficial results.

What has been discovered is that such a method can firstly result in reduced strength of obnoxious smell that has hitherto plagued disposal of animal bodies and it is not entirely clear as to why this happens.

25 Further, while it has been known that ammonia is a possible product of rotting protein materials it has been conventional for others to try to minimise this as it is considered to lead to a loss of nitrogen in eventual compost. In so far that any composting process uses replacement air even if some recirculation takes place then by maintaining recirculation only with the internal gases and no
30 deliberately introduced outside air, the level of whatever is the gaseous discharge of the composting microflora will build up.

35 A further result of recirculation of only internal gaseous materials is that gases which may be warmed from the composting process will stay warm and will transfer that warmth through the mass of materials without outside refreshing

air either generally or in parts cooling this.

Biological processes during composting are implicitly complex

5 What appears to happen is that ammonia as a gas builds up in concentration and rather than this being a disadvantage it has significant advantage in providing at the least assistance in sterilisation in respect of pathogens.

10 A significant advantage of ammonia build-up is that this material is effective in killing a broad spectrum of pathogens while not apparently inhibiting continued composting breakdown of the composting materials. Further, the microflora that is promoted seems to be such that odiferous output is relatively low.

15 Given that the composting materials also produce heat, there appears to be the additional benefit of both increased heat together with an ammonia buildup which provides for an effective better pathogen kill in relation to the composting materials.

20 In one form of this invention then, this can be said to reside in a method of treating materials to be composted which includes the steps of containing such materials within a closed container, pumping air into the container at one part of the contained body of material, and taking the air having passed through the material from the container so that it will substantially recirculate back to an introduction location of the material.

25 In preference, there are means to effect a cyclic operation of such a pump so that it can be switched on and switched off over a decomposing period according to a pre-arranged program.

30 In preference, there is proposed a method of effecting composting of materials having a high protein content which includes the steps of containing such materials within a closed container, pumping air into the container at one part of the contained body of material, and taking the air having passed through the material from the container so that it will substantially recirculate back to an introduction location of the material only air and any gaseous compost product.

In preference, there is a biofilter in the pathway of such recirculating air.

In preference, such biofilter includes compost through which the air and gaseous product to be filtered is passed.

5 In preference, the inlet conduit into the container is arranged to introduce air to a top of the container so that the top of the container acts as a plenum with air at pressure then being pushed downward through a mass of material to be composted to collect apertures within a base of the conduit.

In preference, the base of the container includes a plurality of tubes having apertures therein which are laid to extend across a floor of the container and which are collectively connected to a conduit directed to an inlet of the pump.

10 In preference, the container includes an uppermost pivot supported lid.

In preference, the material to be composted comprises the bodies of dead poultry and the packing of the container includes a first covering of woodchips then successive layers of bodies of poultry, a layer of woodchips, a layer of poultry and so on.

15 Further, it has been discovered that if such recirculation occurs on a regular basis through a decomposing period which can be several weeks, nonetheless, such treatment is sufficient to maintain a dominance of aerobic bacteria with significant improved results.

20 By maintaining what is in effect a closed circuit arrangement, then any odours are substantially contained within the circulating equipment.

25 While various filters can be used to minimise the extent of odour that might be released when the doors are opened to either empty or reload the container, a filter material that has been found to be very useful has been compost which has been made more porous by having this distributed with pine chips.

30 In one form of the invention then it could be said to reside in a method of composting which includes the steps of placing the materials to be composted into a container, sealing the container and then blowing in a recycling manner substantially only the air and gases contained within the container through the composting materials for a period of time to collect and distribute ammonia

sufficient to allow for a substantial buildup in concentration to a pathogen killing level of ammonia derived from the composting materials, and then maintaining such circulation for a sufficient period of time so as to effect a substantial pathogen kill in the composting material.

5

The method has the additional advantage that because the air and gases are simply recycled and are not bled out to atmosphere whether or not through a filter, means that there is no difficulty in having such a container in the vicinity of habitation.

10

It is well known that the putrid smell of rotting carcasses can be considered most offensive and is highly objectionable and will be objected to by many people.

15

A further advantage of the method described is that ammonia being recycled can of itself be separated and be used for other useful purposes such as conversion to fertilizer for instance by passing the nitrogen-rich gases through sulphuric acid to form ammonium sulphate as one example.

20

If the container is made of an uppermost lid that can be lifted to allow access into the body of the container, then the temporary opening of this lid and insertion of birds will not of itself substantially interfere with the process described.

25

The apparatus to perform the method includes a container, a lid that can assume two positions, one of which provides for an airtight seal with respect to the container, and means to effect to circulation of air where there is a manifold extending across a part of the container, which manifold is connected to air blowing means, and a further conduit from the airblowing means to effect

30

direction of air to or from a further portion of the container which is opposite to that in which the manifold is located.

35

In preference, such an arrangement has the manifold extending across a bottom of the container, and air is introduced into a space at the top of the container between the lid and the composting materials, and there are means to effect a switching on and off of the air blower in accordance with a selected procedure.

Such a selected procedure may be to effect a blowing of the air and gases for a period of five minutes each hour or it may involve a longer period of blowing over different periods of time.

- 5 In preference, the composting materials are placed in layers with materials separating the respective layers which are porous.

In this way, air that is being pumped through the composting material, will as it passes successive layers redistribute in the porous intervening layer and pass
10 through the next composting materials layer to the next more open or porous layer.

What we have now is that a container or bin of relatively substantial size such as a bin appropriate for transport on a truck without the need for excess width
15 warnings, is placed at a convenient location for receiving composting materials such as dead poultry.

The poultry is placed in layers with intervening porous materials on to a lower manifold of pipes with a plurality of apertures throughout the length of the
20 respective pipes to effect therefore a distributed passage of air and of course gathered gases.

Once loaded, the container has a lid that is openable from the top for loading of the chickens but thereafter closed in such a way as will provide an effective
25 air seal.

From here, the program is set to circulate air on a regular basis but only on the basis that it is the air that is captured within the bin and any composting gases that are formed.

30 Because the material is in a closed container, and the air recirculating devices in preference are external but nonetheless sealed from allowing any additional outside air to be introduced.

35 By continuing this program for a period, the rotting carcasses will start to decompose and in an environment that is slowly changing from aerobic to anaerobic, it is found that there is a nitrogen buildup in the form of ammonia which is then transferred through all of the stored composting materials.

By recycling over a significant period of time without refreshing the air within the recycling path, results in a significant buildup of this alternate gas which has the significant beneficial advantage that this will then assist significantly in the pathogen kill off.

The invention then can also reside in the method of treatment of waste which includes the steps of placing the waste in a container, recirculating air through the waste held in the container so as to at least for a substantial period of time, recirculate only that air and any gaseous product of decomposition of the waste.

In preference, the container is such that it can be opened for introduction of and removal from waste from the container, and has a access lid which can close the container against any substantial air access outside of the container.

Preferably, the process described is continued until a substantial concentration of ammonia is built up within the circulating air whereby to effect a substantial kill off of any pathogens within the refuse.

In preference, the refuse includes materials having substantial protein content

For a better understanding of this invention it will now be described with relation to a preferred embodiment in which

Figure 1 illustrates an apparatus in accord with this invention providing the facilities for carrying out the method of the invention.

Figure 2 is a cross sectional view through the decomposing mass illustrating arrangements for air flow from the top to the bottom and illustrating some of the details of the collector of the system within the container at the bottom.

Referring to the drawings, there is a container 1 which has an openable lid 2 which closes with respect to its surrounding perimeter by means of a resilient seal 3 so as to provide a substantially airtight closure with the container 1.

Across the bottom of the container 1 are a series of conduits 4 which have a plurality of holes passing through the walls thereof shown typically at 5.

The conduits 4 are collectively joined to a single exiting conduit 6 which feeds into a pump 7 and through a biofilter 8 back into a supply conduit 9.

5 The biofilter in this case is a smaller container which contains 50% pine chip and 50% compost which is mixed together to provide a sufficiently porous mix so that the air driven from the pump can effectively pass through this and then into the inputting conduit 9 into the top of the container 1 at 10 to thereby provide in a sense a plenum effect.

10 The poultry carcasses are shown typically at 11 and these are separated by layers of pine chips so that there is a lower most level of pine chips which surrounds the take-off conduits at 12 and then there are layers of dead carcasses and pine chips successively to an upper most surface.

15 In use, this arrangement then is operated by means which are not specifically shown which however cause the pump to drive air in a circulating manner from the plenum in the container through the rotting carcasses and pine chips to the collecting conduits at the bottom of the container, through the pump then through the filter and back into the plenum so that only the air and compost resulting gases are circulated over a substantial time.

20 In a further example the direction of the gas flow is from the lowermost manifold up through the layers to the uppermost plenum and then through the recirculating fan or pump.

25 A usual cycle of loading a container and proceeding through a composting program will be about 12 weeks with a first 6 weeks during which a first load of chickens will be placed a first layer of shavings and chicken litter. Apart from opening an upper lid to further load further chickens which will happen once a day the fan is operated so as to circulate only the air existing in the system and such gas products that are generated. These include ammonia.

A pattern of recirculation found to be effective is 2 hours on and one hour off. This then is continued for a full period of six weeks after which the material is then transported to a central depot.

30 In one example the level of ammonia is found to build over a first week to 50 parts per million and then over the next several weeks to continue to build up

to and generally stay at 500 parts per million.

Pathogen kill off has been normally in previous composting attempts prior to this invention expected to occur with sustained high temperature alone. This temperature needs to be at least 55 degrees centigrade for three continuous days or at least 45 degrees centigrade for 12 continuous days. There is significant difficulty in ensuring that all parts of the material is kept at or above this temperature continuously and no obviously apparent way to ensure that it in fact has all been so affected. This self evidently leaves the situation as most unsatisfactory. It will now be seen that the value of significant ammonia levels is that this material will act in conjunction with temperature making a two pronged attack on the pathogens.

In trials so far, the kill off capacity of an environ in the container after approximately 7 days into a six week program has been such that a sample of e-coli survived less than three hours.

Further assistance to what is happening can perhaps be gained by information that the oxygen level in the same example reduced to 5.6% and CO₂ to 12 % as compared to fresh air having 21% oxygen and about 0.04% CO₂.

Further any smell normally associated with composting of poultry was significantly reduced or at least changed so as to be nowhere near as obnoxious.

The level of ammonia is found generally to build up and be kept within a range of from 50 parts per million to 500 parts per million of the gaseous materials in the container including air.

In the embodiment in the trials conducted so far, it has been possible to open the lid of the container while the composting is in place and to place one's head within the upper plenum area without smelling a substantially obnoxious odour.

The method therefore allows for routine opening and closing of the lids to allow for addition of further carcasses. If this occurs while there is no recirculation occurring then this allows for introduction of fresh air but keeps

to a minimum any loss in the concentrations of ammonia and CO₂.

From further trials the following has been further observed.

5 In the container and associated closed connections in accord with this invention, temperatures have been found to be within the range of from 40 degrees centigrade to 60 degrees centigrade. The cooler temperatures are apparent during early stages of the composting process and at the sides of the container. Ammonia levels are 50mg/L at an early stage and will generally reach 100 mg/L and more after a period. And after several additional levels of mortalities have been introduced. Levels of oxygen have been measured and
10 stay generally within the range of from 5.3% to 16.6% of total volume of gases.

The tests for pathogen survival have so far involved the use of two surrogate bacterial pathogens *Escherichia coli*, and *Salmonella typhimurium*. These bacteria were introduced into the container as operating according to the invention and were placed in both sealed containers in the one case and
15 unsealed containers in the other. These were placed at various locations through the container and the results were then assessed over a 24 hour period.

The sealed containers were sealed against gas so that these will act as a control.

20 Reduction in cell count from 10 to the eighth to below detection in respect of both bacteria types where these were in the open container at both 50 degrees centigrade and 60 degrees centigrade. Reductions observed were at least ten fold higher with exposure to both temperature and gases compared to exposure to temperature alone.

25 For example, there were still 300 viable cells of *E-COLI* after 6 hours at 60 C in the sealed tubes whereas there were no detectable cells in the open tube after the same time and same temperature.

At lower temperatures also such as 36 degrees centigrade after 24 hours there were no viable cells detectable in the open tubes for both species of
30 bacteria.

CLAIMS

1. A method of treating materials to be composted which includes the steps of containing such materials within a closed container, pumping air into the container at one part of the contained body of material, and taking the air having passed through the material from the container so that it will substantially recirculate back to an introduction location of the material.
5
2. A method of treating materials to be composted as in the immediately preceding claim further characterised in that there are conduits attached to the container which are also coupled to an air pump so that the air pump will cause the air to be extracted through one conduit and to be introduced back into the container through the other conduit.
10
3. A method of treating materials to be composted as in either one of the preceding claims further characterised in that the recirculation is effected from time to time through the period of composting.
15
4. A method of treating materials to be composted as in any one of the preceding claims further characterised in that the recirculating air and gaseous is through a biofilter in the pathway of such recirculating gases.
- 20 5. A method of treating materials to be composted as in the immediately preceding claim further characterised in that the biofilter includes compost through which the air to be filtered is passed.
6. A method of treating materials to be composted as in any one of the preceding claims further characterised in that in the steps of the packing of the container includes effecting a first covering of woodchips then successively a layer of bodies of the material to be composted and a layer of absorbing woodchips.
25
7. A method of composting materials which are high in protein content including the steps of holding the composting materials in a closed container and recycling through the material substantially only the air
30

and any resultant gaseous give off from the composting materials.

- 5 8. A method as in the immediately preceding claim further characterised in that there are means to effect a cyclic operation of a pump so that it can be switched on and switched off over a decomposing period according to a pre-arranged program.
- 10 9. A method of composting which includes the steps of placing the materials to be composted into a container, sealing the container and then blowing in a recycling manner substantially only the air and gases contained within the container through the composting materials for a period of time to collect and distribute ammonia sufficient to allow for a substantial buildup in concentration to a pathogen killing level of ammonia derived from the composting materials, and then maintaining such circulation for a sufficient period of time so as to effect a substantial pathogen kill in the composting material.
- 15 10. A method as in one of the preceding method claims further characterised in that the composting materials are placed in layers with materials separating the respective layers which are porous.
- 20 11. A method of treatment of waste which includes the steps of placing the waste in a container, recirculating air through the waste held in the container so as to at least for a substantial period of time recirculate substantially only that air and any gaseous product of decomposition of the waste.
- 25 12. A method of composting as in any one of the preceding method claims having a cycle of loading a container and proceeding through a composting program of about 6 weeks duration during which a first load of chickens will be placed a first layer of shavings and chicken litter and then apart from opening an upper lid to further load further chickens on an occasional basis on an approximately once per day, operating the fan so as to circulate only the air existing in the system and such gas products that are generated.
- 30 13. A method of composting as in any one of the preceding method claims further characterised in that the process is arranged such that a level of
- 35

ammonia will be built up and maintained during the period of the composting to be at the least to a level within the air and gas compost products which is in excess of 50 parts of ammonia per million parts of total gaseous materials including air in the container.

- 5 14. A method of composting as in any one of the preceding method claims further characterised in that the process is arranged such that a level of ammonia will be built up and maintained during the period of the composting to be at the least to a level within the air and gas compost products which is in a range of from 50 to 500 parts of ammonia per
10 million parts of total gaseous materials including air in the container
15. Apparatus for the composting of material which includes a container which has an openable lid which closes with respect to its surrounding perimeter by means of a resilient seal so as to provide a substantially airtight closure with the container, across the bottom of the container
15 being a series of conduits which have a plurality of holes passing through the walls thereof which are collectively fed to a single exiting conduit which feeds into a pump and through a filter back into a supply conduit.
- 20 16. Apparatus for the composting of material as in the immediately preceding claims the filter being a smaller container which contains approximately equal proportions by volume of wood chips and compost which is mixed together to provide a sufficiently porous mix so that the air driven from the pump can effectively pass through this and then into an input conduit into a top of the container
- 25 17. Apparatus for the composting of material as in the immediately preceding claim further characterised in that there are, within the container, poultry carcasses which are separated by layers of chips so that there is a lower most level of pine chips and then there are layers of dead carcasses and pine chips successively to an upper most surface.
- 30 18. An apparatus to perform the method as in any one of the method claims herein and including a container, a lid that can assume two positions, one of which provides for an airtight seal with respect to the container, and means to effect to circulation of air where there is a manifold

extending across a part of the container, which manifold is connected to air blowing means, and a further conduit from the air blowing means to effect direction of air to or from a further portion of the container which is opposite to that in which the manifold is located.

- 5 19. Compost resulting from a method as in any one of the preceding method claims.
20. A method of composting substantially as described in the specification with reference to and as illustrated by any one or more of the accompanying drawings.
- 10 21. Apparatus for composting substantially as described in the specification with reference to and as illustrated by any one or more of the accompanying drawings.

1/2

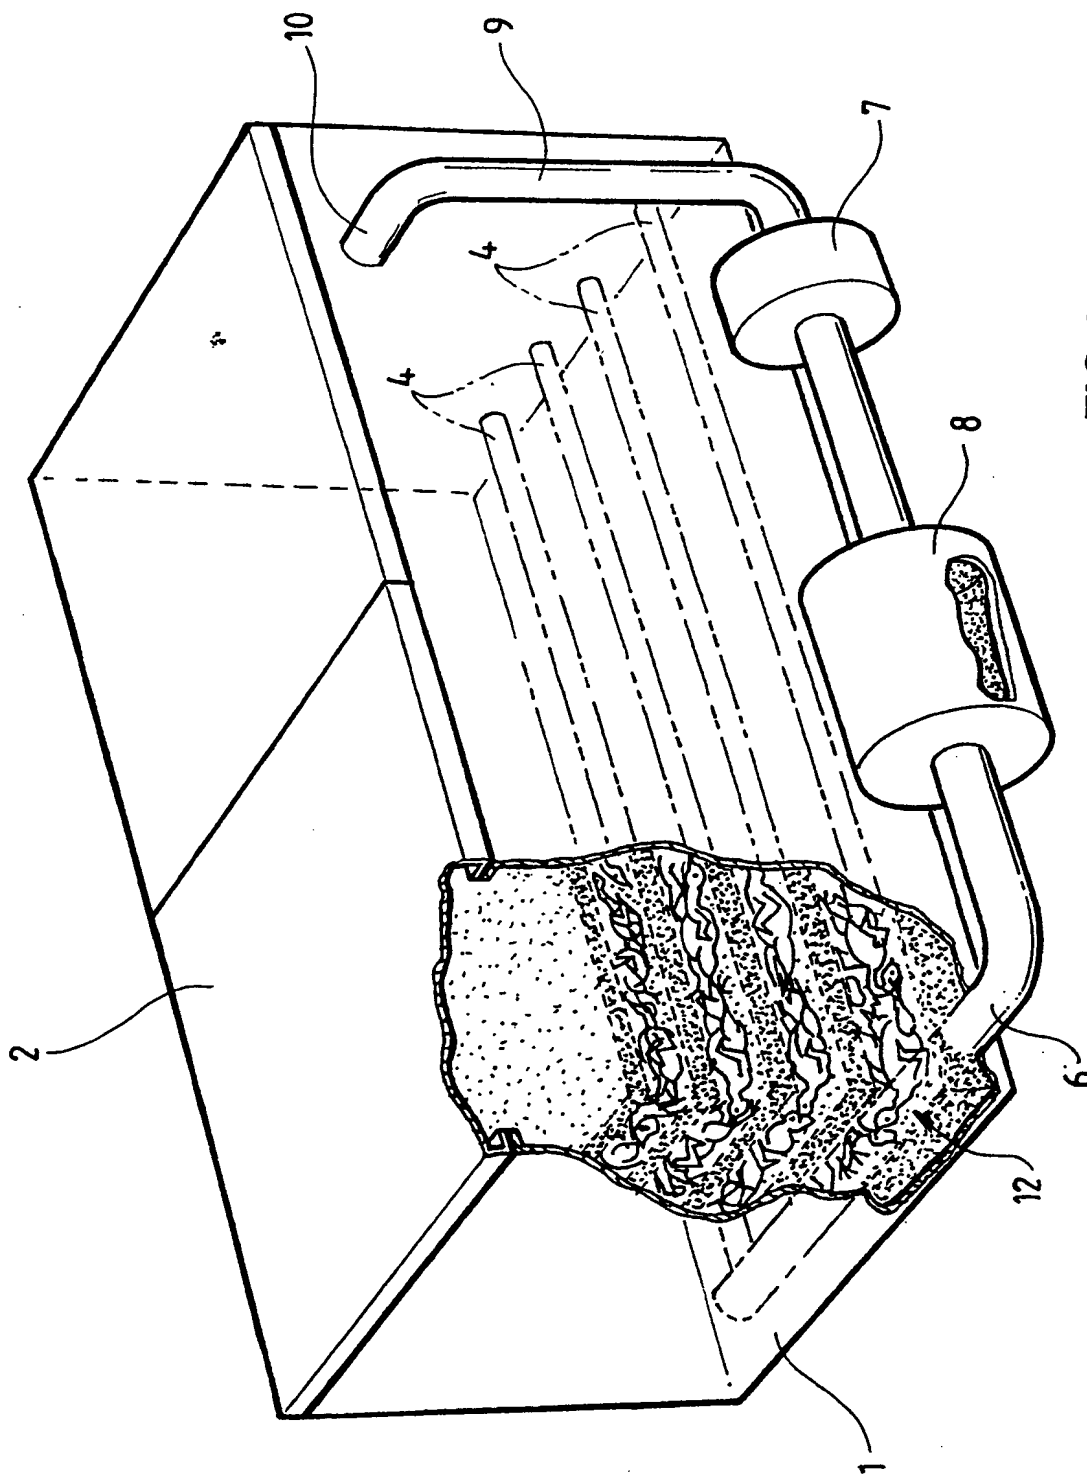


FIG 1

2/2

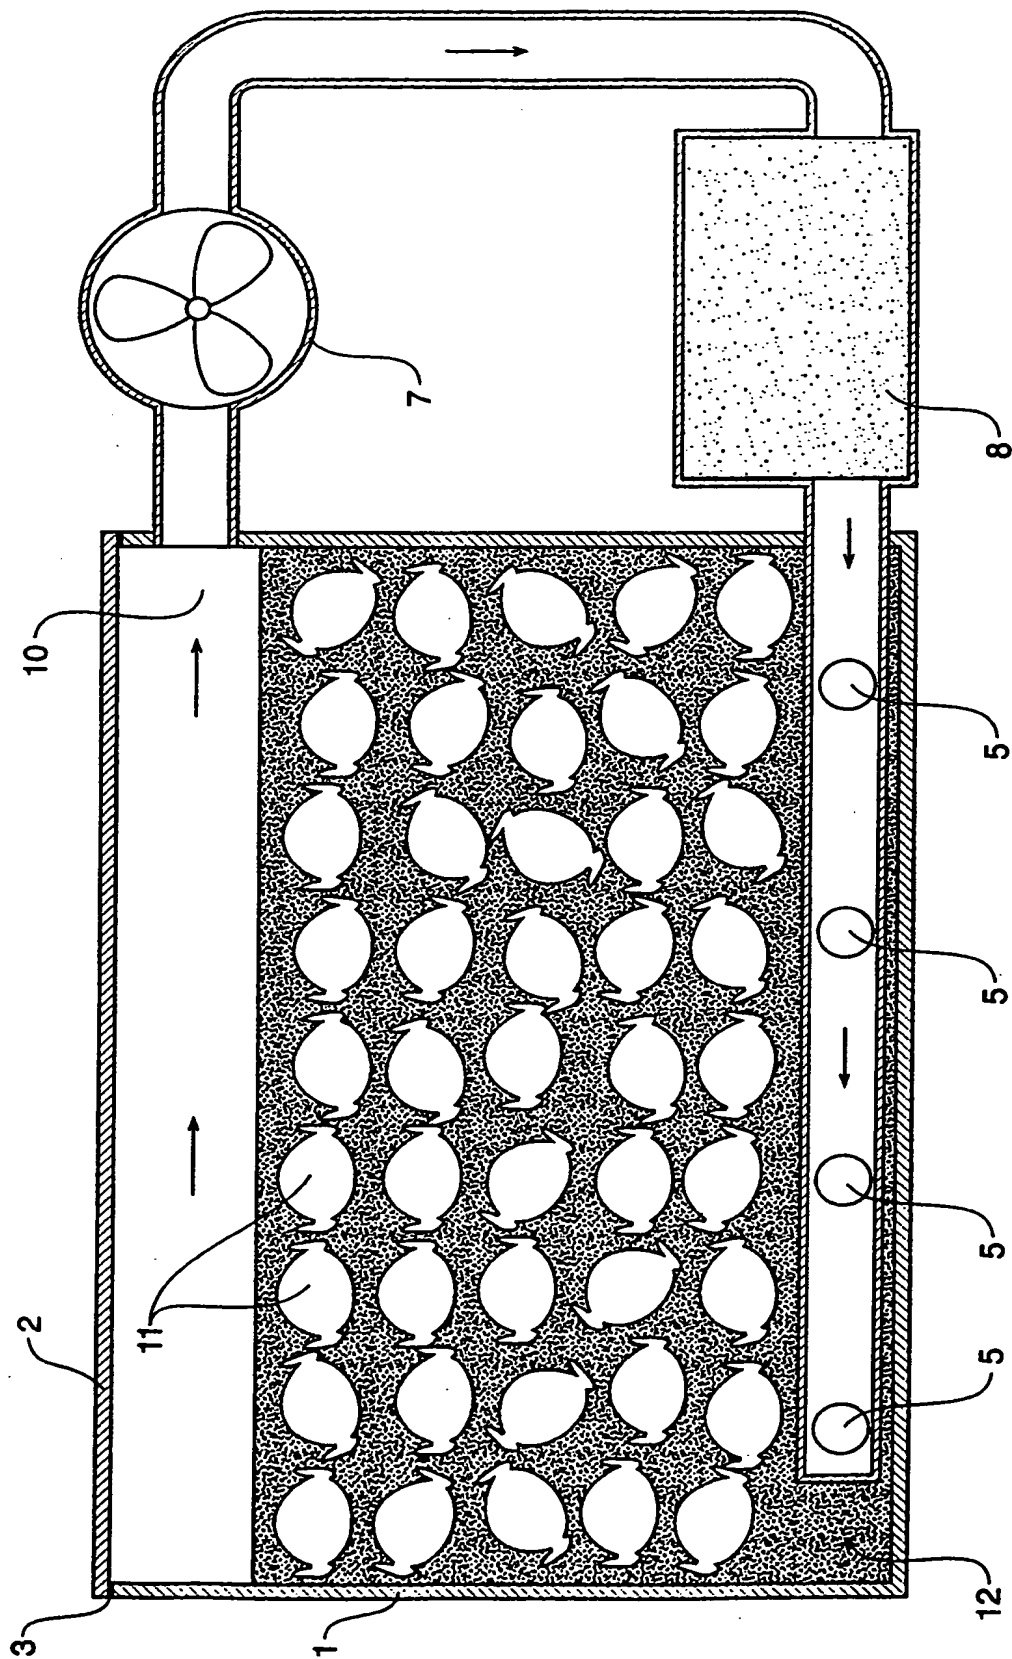


Fig 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 99/01133

A. CLASSIFICATION OF SUBJECT MATTER

Int Cl⁷: C05F 1/00, 1/02, 17/02, 9/02, 17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC AS ABOVE

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
STN FILE WPIDS, IPC AS ABOVE WITH KEYWORDS RECIRC? OR SEAL? OR PUMP?

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO, A, 9607624 (E.R. BJERAGER) 14 March 1996. See whole document.	1-21
X	CA, A, 2114350 (SAVOY ENTERPRISES LTD), 28 July 1995. See whole document.	1-21
X	US, A, 5587320 (Y. Shindo <i>et al.</i>), 24 December 1996. See whole document.	1-21

☒ Further documents are listed in the
continuation of Box C

☒ See patent family annex

<p>* Special categories of cited documents:</p>		
"A"	Document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
01 January 1999

Date of mailing of the international search report

21 FEB 2000

Name and mailing address of the ISA/AU
AUSTRALIAN PATENT OFFICE
PO BOX 200
WODEN ACT 2606 AUSTRALIA
E-mail address: pct@ipaustalia.gov.au
Facsimile No.: (02) 6285 3929

Authorized officer

L.F. MCCAFFERY
Telephone No.: (02) 6283 2573

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU 99/01133

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP, A, 599661 (H. Shimizu <i>et al.</i>), 1 June 1994. See whole document.	1-21
X	EP, A, 371385 (OUTOKUMPU OY) 6 June 1990. See whole document.	1-21
X	CH, A, 645333 (UTB Umwelttechnik Buchs AG) 28 September 1984. See whole document.	1-21
X	DE, A, 4107340 (K-E. SCHNORR) 10 September 1992. See whole document.	1-21
X	DE, A, 4021868 (HERHOF-UMWELTTECHNIK GmbH) 14 November 1991. See whole document.	1-21
X	EP, A, 647604 (HERHOF UMWELTTECHNIK GmbH) 12 April 1995. See whole document.	1-21
X	DE, A, 19521474 (BÜHLER AG), 11 January 1996. See whole document.	1-21
X	DE, A, 4021865 (HERHOF-UMWELTTECHNIK GmbH) 23 January 1992. See whole document.	1-21

INTERNATIONAL SEARCH REPORT **Information on patent family members**

International application No.
PCT/AU 99/01133

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member	
WO	96/07624	AU	33801/95
		DK	235/97
CA	2114350	NONE	
US	5587320	DE	4414387
		JP	7124538
		JP	6304542
EP	599661	JP	7148479
EP	371385	CA	2003606
		DK	5731/89
		FI	885526
		JP	2180688
		US	5034131
CH	645333	NONE	
DE	4107340	NONE	
DE	4021868	EP	458136
		EP	606119
		JP	7000943
EP	647604	DE	4334435
		EP	776874
		DE	4345238
DE	19521474	CH	686573
END OF ANNEX			